

FIX-A-LOO®

THUNDERFLUSH® DUAL FLUSH CISTERN OUTLET VALVE

BUTTON
HEIGHT
ADJUSTORS

FRONT
VIEW

WEDGE
WASHER
BACK NUT



SIDE
VIEW

TO CONVERT
TO A 9 LITRE
FULL FLUSH,
REMOVE
THE SHADED
PANELS AS
INDICATED.

THESE
PANELS CAN
EITHER BE
SNAPPED
OUT BY
HAND, OR
BY CUTTING
THE EDGES
WITH A
SHARP
INSTRUMENT.

REMOVE
PANELS ON
BOTH SIDES.

INSTALLATION INSTRUCTIONS

REMOVE YOUR OLD VALVE


- Turn off water at cistern tap.
- Remove lid, and take note of your cistern waterline.
- Flush cistern until cistern is empty.
HANDY HINT - Place a bucket underneath the outlet, as a small amount of water may remain in the cistern and/or pipes.
- For a regular pan and cistern, remove the flush pipe by unscrewing the flush pipe cap nut under the cistern.
- For a close coupled pan and cistern, the cistern will have to be removed by unscrewing the nuts under the cistern and lifting the cistern off the pan.
- Remove the existing outlet valve by unscrewing the back nut located underneath the cistern.

INSTALL YOUR NEW VALVE

Your outlet valve is supplied configured for an approximate 6/3 litre dual flush.

If you would like to convert to 9/4.5 litre dual flush, remove the two indented panels on the sides of the valve as indicated on the Side View image.

- You may need to adjust the height of the buttons on your new valve. Use your old valve as a guide to work out the correct height.
- Using a Phillips Head screwdriver, adjust the height of the buttons on the Thunderflush® Outlet Valve to match the same height as your old valve.
- Remove the back nut from your new Thunderflush® Outlet Valve, then place the valve and the wedge washer into the cistern with the wedge washer positioned narrow end facing downwards. Attach the back nut to the threaded outlet underneath the cistern to secure the outlet valve. Reattach the flush pipe and flush pipe nut, ensuring that the flush pipe seal sits inside the flush pipe nut.
- Turn on water at the cistern tap.
- Flush the cistern, and check for leaks. If the water level is above the central overflow tube, adjust your inlet valve to reduce the water level.

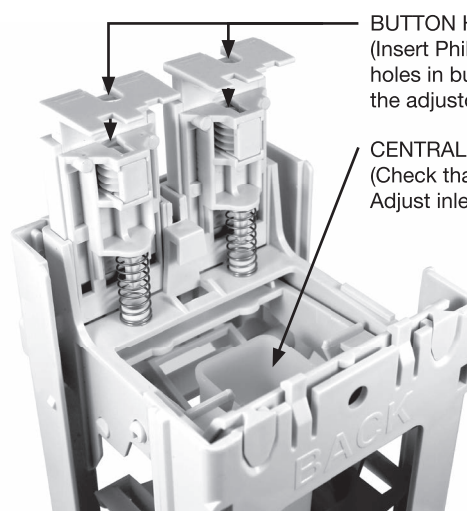

BUTTON HEIGHT ADJUSTORS
(Insert Phillips Head screwdriver into holes in button paddles and down to the adjustors underneath).

CENTRAL OVERFLOW TUBE
(Check that water is not overflowing into the tube. Adjust inlet valve if necessary to lower the water level).

Compatible Cisterns:
Caroma Sovereign 6/3L,
Viceroy 6/3L &
Reflections 6/3L.
Period of Manufacture:
1982-1995.


WaterMark
AS 1172.2:2014
WMK00518
SAI GLOBAL

FIX-A-LOO®

THUNDERFLUSH® DUAL FLUSH CISTERN OUTLET VALVE

MAINTENANCE AND SPARE PARTS

- If water leaks into the pan, inspect seating washer and replace if necessary (FIX-A-LOO® Replacement Part #226129).
- If water is leaking around the flush pipe, inspect and replace the wedge washer (#206398) or the flush pipe ring (#208484).

WARNING: INSTALLATION MUST BE IN ACCORDANCE WITH AS/NZS 3500.1

- We recommend that all plumbing products be installed by a licensed plumber. This product is not to be used in conjunction with a Caroma base outlet valve. The Thunderflush® unit must be installed in its entirety or warranty may be void.

SUITABILITY

- Compatible cisterns: Caroma Sovereign 6/3L, Viceroy 6/3L & Reflections 6/3L. Period of Manufacture: 1982-1995.

WARRANTY INFORMATION

12 YEAR WARRANTY

This warranty runs for twelve years from the date of purchase. Our products come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other loss or damage. You are also entitled to have the goods repaired if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

WHAT IS COVERED:

This warranty covers any defects in materials or workmanship with the exception of the reasons stated below. The warranty covers the product used in normal domestic use.

WHAT IS NOT COVERED:

This warranty does not cover wear and tear to working parts, misuse or abuse, or discolourations due to exposure to cleaning chemicals. We recommend installation by a licensed plumber. Warranty may be void if the product is incorrectly installed.

The warranty does not cover the wedge washer (replacement part #206398), the flush pipe ring (#208484), or the seating washer (#226129). These parts only have a 12 month warranty and should be replaced periodically as they wear out.

CLAIM PROCEDURE:

If you believe that you have a legitimate claim with your FIX-A-LOO® Thunderflush® Outlet Valve, please contact Fix-A-Tap Australia via our website at www.fixatap.com.au to complete the warranty claim form. Alternatively you can contact our office on (02) 9476 7400.

Any written correspondence should be sent to: Fix-A-Tap Australia, Units 1-2, 41 Leighton Place, Hornsby NSW 2077. Please keep your receipt for proof of purchase.